


PowerCu Soft Bonding Ribbons

Copper Bonding Ribbons of Extreme Softness

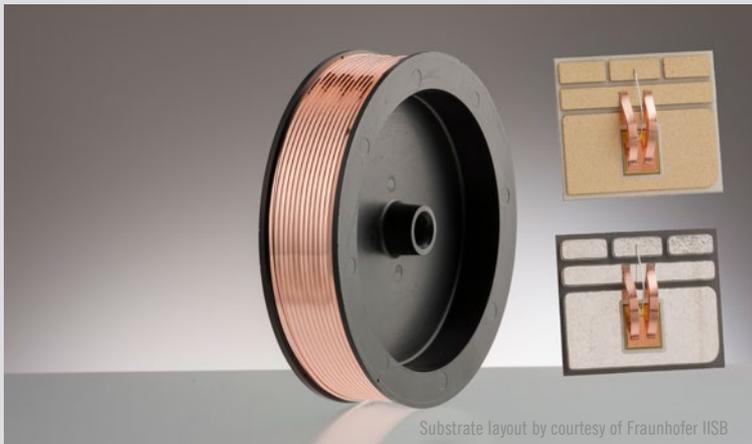

Substrate layout by courtesy of Fraunhofer IISB

PowerCu Soft Bonding Ribbons Benefits

- Extreme softness
- Best thermal stability
- Uniform fine grained structure
- Advanced mechanical properties for bonding technologies
- Highest Cu purity for electrical resistance
- Replaces up to 3 single Cu wires

PowerCu ■ **SOFT**

PowerCu Soft bonding ribbons are Heraeus' preferred material for the next generation of power devices – enabling module operation temperatures higher than 250°C. In comparison with standard aluminum bonding ribbons, PowerCu Soft bonding ribbons comes with superior electrical conductivity, increased fusing current values and extraordinary mechanical properties. It is favored in advanced packaging modules dedicated for high operation temperature and highest robustness challenges.

Due to the mechanical property differences of aluminum and copper, higher bonding forces and special consumables are required to process the PowerCu Soft bonding ribbons. A robust frontside copper metallization is required for a stable and controlled bonding process. Heraeus Die Top System (DTS) is offering a perfect matching solution.

A special process sequence enables Heraeus to manufacture extremely soft and fine grained PowerCu Soft bonding ribbons. The excellent bondability of PowerCu Soft bonding ribbons is based on the material's low deformation resistance.

Next generation technologies based on SiC (silicon carbide) or GaN (gallium nitride) are demanding for solutions in regards of power density, operation temperature or low conductivity. Copper is the perfect match material fulfilling next generation technology requirements.

In addition cost optimization within production (UPH improvement) can be achieved by upgrading wires to ribbons. One PowerCu Soft ribbon (0.3x2mm) is able to replace up to three 500µm Cu wires.

Recommended Technical Data of PowerCu Soft Bonding Ribbons

Dimension	mm	0.1 x 1	0.2 x 1	0.3 x 1	0.1 x 1.5	0.2 x 1.5	0.3 x 1.5	0.1 x 2	0.2 x 2	0.3 x 2
	mils *	4 x 40	8 x 40	12 x 40	4 x 60	8 x 60	12 x 60	4 x 80	8 x 80	12 x 80
Elongation	%	> 10								
Breaking Load	cN	2100 - 2700	4200 - 5400	6300 - 8100	3100 - 4100	6300 - 8100	9500 - 12100	4200 - 5400	8400 - 10800	12600 - 16200

For other diameters, please contact Heraeus Electronics Product Management.

* 1mil ≈ 25µm

1cN ≈ 1g

Characteristics of PowerCu Soft Bonding Ribbons



Melting Point	1083	°C
Modulus of rigidity	48	GPa
Thermal conductivity at 20°C	399	W/(m * K)
Linear expansion coefficient (20°C – 30°C)	16.8	10 ⁻⁶ * K ⁻¹
Electrical Resistivity at 20°C	1.8	μΩ * cm
Temperature coefficient of electrical resistance (0°C – 300°C)	3.9	10 ⁻³ * K ⁻¹
Meter resistance at 0.2 x 1mm μm (20°C)	91.7	Ω/m
Density	8.933	Kg/dm ³

Other Guidelines

Floor Life	14	days
Shelf Life Time	6	months

* Theoretical bulk material properties

Substitution Matrix : Wires By Ribbons

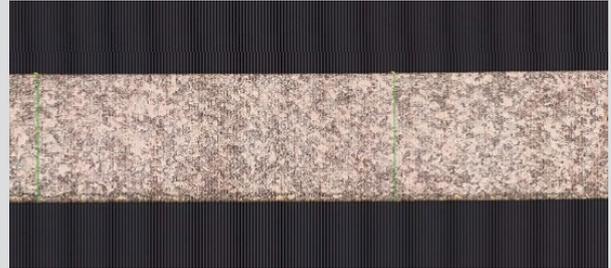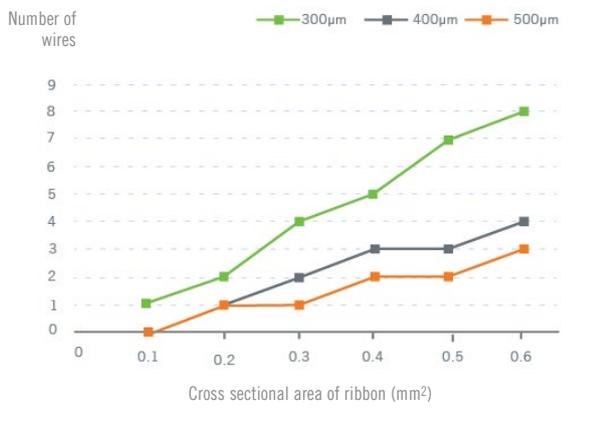

Fine grained and homogeneous texture of Cu ribbons



Cross section of PowerCu Soft ribbon with natural rounded and burr-free edge

Heraeus Electronics
 Heraeus Deutschland GmbH & Co. KG
 Heraeusstraße 12-14
 63450 Hanau, Germany
www.heraeus-electronics.com

Americas
 Phone +1 610 825 6050
electronics.americas@heraeus.com

China
 Phone +86 21 3357 5164
electronics.china@heraeus.com

Japan
 Phone +81 (3) 6902 6585
electronics.japan@heraeus.com

Asia Pacific
 Phone +65 6571 7649
electronics.apac@heraeus.com

Europe, Middle East and Africa
 Phone +49 6181 35 4370
electronics.emea@heraeus.com

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for particular application.