

Technical Data Sheet



Product Type: No Clean Solder Paste
 Product Name: Microbond® SMT650
 Product ID: F650 SA30C5-89M40

Description

Automotive applications, supporting infrastructures, and high reliability applications in general, are more prone to moisture-related failure modes. Continued product miniaturization drives the need for smaller case-size components and fine pitch devices with reduced stand-off heights which trap post-process residues under components. Residual PCB moisture; in addition to elevated humidity and temperature exposure, promotes moisture absorption into these residues resulting in electromigration, which leads to premature device failure.

With the new F650 SA30C5-89M40 solder paste, Heraeus has developed a flux which eliminates electromigration caused by moisture-induced residues, especially in fine feature applications. The flux system is available for SAC-based; as well as InSn alloys, and is compatible with conformal coatings, solder resist, active and passive components, various PWB materials and combinations.

Key Benefits

- Halogen Zero
- Good wetting under Nitrogen atmosphere
- Preventing electromigration in fine feature applications

Applications

- Printing

Product Code and Alloy

Product Code					Powder Properties		
Paste	Alloy	Metal Content	*Viscosity	Powder Type	Particle Size	Alloy	Melting Point
F650	SA30C5	89 %	M	4	20 – 38 µm	Sn96.5/Ag3/Cu0.5	217 °C

*D = Dispense grade M = Print grade H = Print grade, high L = Dipping/letting grade, Low

Flux Activity


Activity Level (J-STD 004)	ISO 9454-1 {DIN EN 29454-1}	Classification
RELO	1.2.3.C	No Clean/ Solvent Clean

Halogen Content

Halogen-Zero (No halogen added in the flux)
Tolerances: Halogen < 50 ppm; measured according to BS EN 14582

Technical Data Sheet

Recommended Reflow Profile

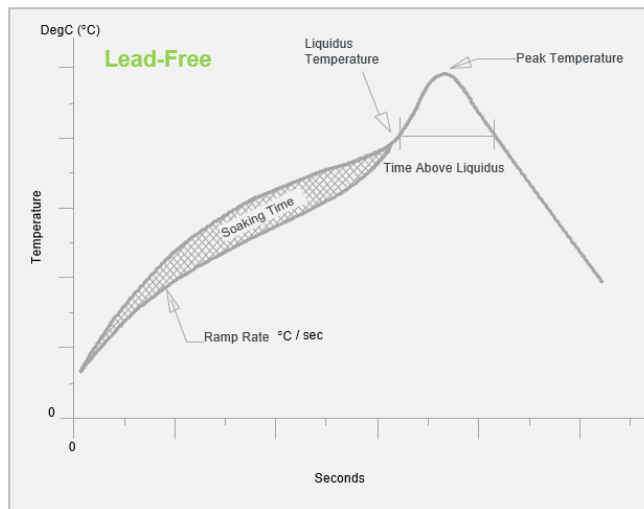

Recommended Profile	
Average Ramp Rate	1 – 3 °C/s
Peak Temperature	15 °C (min) – 40 °C (max) above Melting Temperature
Time above liquidus	45 – 90 s
Reflow Atmosphere Type 3 – 5	Reflow in Air or in N ₂ with < 2000 ppm O ₂

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for a particular application)

Cleaning Instructions

After reflow flux residues may remain on the circuit and do not need to be washed. For cleaning of wet paste or if desired for cleaning of flux residues Zestron and Vigon cleaners can be used – see separate cleaning recommendations.

Storage

- Store the solder paste in tightly-sealed containers and avoid exposure to sunlight and high humidity
- Max expiration date: please refer to the expiry date on the label of the packaged product
- Storage condition in the refrigerator at 2 - 10 °C
- Store cartridges with tip pointing downwards

Paste Preparation

- Remove paste from fridge: Before opening the package, leave paste for at least 4 hours (depending on jar/ cartridge size) at room temperature, so that paste warms up
- Do not open jar/cartridge while paste is cold to prevent condensation
- Do not heat the paste beyond room temperature
- Before using paste jar: To obtain uniform, stable viscosity stir paste for 1 – 2 min, using stainless steel or chemically resistive plastic spatula

Heraeus Electronics
Heraeus Deutschland GmbH & Co. KG
Heraeusstraße 12 – 14
63450 Hanau, Germany
www.heraeus-electronics.com

Americas
Phone +1 610 825 6050
electronics.americas@heraeus.com

China
Phone +86 21 3357 5457
electronics.china@heraeus.com

Asia Pacific
Phone +65 6571 7677
electronics.apac@heraeus.com

Europe, Middle East and Africa
Phone +49 6181 35 3069, +49 6181 35 3627
electronics.emea@heraeus.com