

Technical Data Sheet



Product Type: Water Soluble Solder Paste
Product Name: Welco® AP5112
Product ID: SnAg3Cu0.5-P7-WS5112-7

Description

SnAg3Cu0.5-P7-WS5112-7 is a state-of-art water soluble printing paste, with low halogen contents; Cl or Br < 500 ppm, total < 900 ppm. Splashing performance is exceptional; minimizing occurrence of solder defects and improves yield. It is suitable for component attach system in package applications.

Key Benefits

- Good printability on fine pitch pad size
- Minimal solder splashing
- Good wetting performance
- Good cleaning properties
- Halogen free

Applications

- Printing

Product Code and Alloy

Product Code					Powder Properties		
Paste	Alloy	Metal Content	Viscosity	Powder Type	Particle Size	Alloy	Melting Point
WS5112	Sn/Ag3/Cu0.5	87%	M	7	2 – 11 µm	Sn96.5/Ag3/Cu0.5	217 - 219°C

*D = Dispense grade M = Print grade H = Print grade, high L = Dipping/Jetting grade, Low

Flux Activity

Activity Level (J-STD 004)	Classification
ORH1	Water Soluble

Halogen Content


Halogen Free
Tolerances: Cl or Br < 900 ppm, total < 1500 ppm; measured according to BS EN 14582

Basic Test Properties [IPC TM-650]

Solder Balling	Wetting Test	Slump Test (mm)
Pass	Pass	0.06 – 0.15

Technical Data Sheet

Recommended Reflow Profile

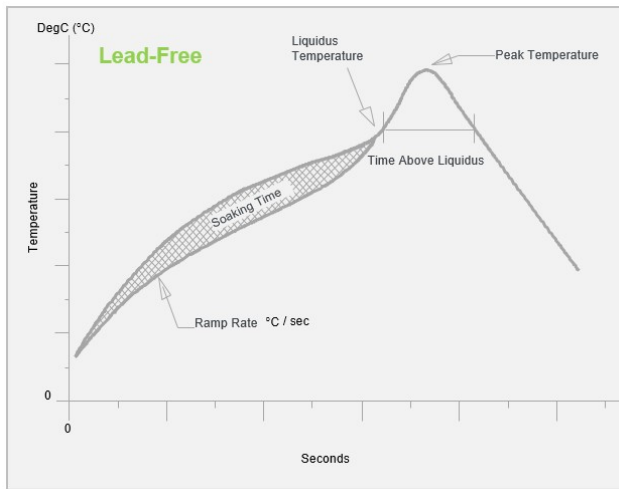

* Graph not drawn to scale

Recommended Profile

Average Ramp Rate	1 – 3 °C/s
Peak Temperature	30 °C (min) – 50 °C (max) above Melting Temperature
Time above liquidus	40 – 90 s
Reflow Atmosphere	Reflow in N₂ with
Type 3 – 5	< 200 ppm O₂
Type 6 – 7	< 100 ppm O₂

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for a particular application)

Cleaning Instructions

After reflow flux residues remain on the circuit and need to be washed. Hot deionized water at a minimum temperature of 30 °C – 40 °C as soon after reflow as possible.

Storage

- Store the solder paste in tightly-sealed containers and avoid exposure to sunlight and high humidity
- Max expiration date: please refer to the expiry date on the label of the packaged product
- Storage condition in the refrigerator at 2 - 10 °C
- Store cartridges with tip pointing downwards

Paste Preparation

- Remove paste from fridge: Before opening the package, leave paste for at least 4 hours (depending on jar/ cartridge size) at room temperature, so that paste warms up
- Do not open jar/cartridge while paste is cold to prevent condensation
- Do not heat the paste beyond room temperature

Heraeus Electronics
Heraeus Deutschland GmbH & Co. KG
Heraeusstraße 12 – 14
63450 Hanau, Germany
www.heraeus-electronics.com

Americas
Phone +1 610 825 6050
electronics.americas@heraeus.com

China
Phone +86 21 3357 5457
electronics.china@heraeus.com

Asia Pacific
Phone +65 6571 7677
electronics.apac@heraeus.com

Europe, Middle East and Africa
Phone +49 6181 35 3069, +49 6181 35 3627
electronics.emea@heraeus.com