

M 620, Platinum Temperature Sensor according to DIN EN 60751

Temperature range -70 °C to +500 °C, short-term up to +550 °C

M series PRTDs are designed for large volume applications where long-term stability, interchangeability and accuracy over a large temperature range are vital. Due to the high resistance values of 2000 Ω the signal gain is excellent. The products are typically used in white goods, HVAC, energy management, medical and industrial equipment. In principle, the products can also be used in automotive applications; in this case Heraeus will check upon the request of the customer, whether additional requirements can be met (e.g. IMDS, PPAP).

Nominal Resistance R_0	Tolerance	Order Number	Packaging
2000 Ohm at 0 °C	F 0.3 (Class B)	32 208 541	Plastic bag

The measuring point for the nominal resistance is defined at 8 mm from the end of the sensor body.

Temperature and tolerance range

Tolerance class F 0.3 (B): -70 °C to +500 °C
 Continuous operation (temporary use to +550 °C possible)

Temperature coefficient

TCR = 3850 ppm/K

Response time

Water current (v= 0.4m/s):
 $t_{0.5} = 0.08$ s
 $t_{0.9} = 0.25$ s

Air stream (v= 2m/s):
 $t_{0.5} = 3.7$ s
 $t_{0.9} = 11.5$ s

Measuring current

2000 Ω: 0.1 to 0.3 mA
 (self-heating has to be considered)

Long-term stability

R_0 -Drift 0.04 % after 1000 hours at 500 °C

Self-heating


0.3 K/mW at 0 °C

Insulation resistance

> 100 MΩ at 20 °C
 > 2 MΩ at 500 °C

Vibration resistance


At least 40 g acceleration at 10 to 2000 Hz, depends on installation

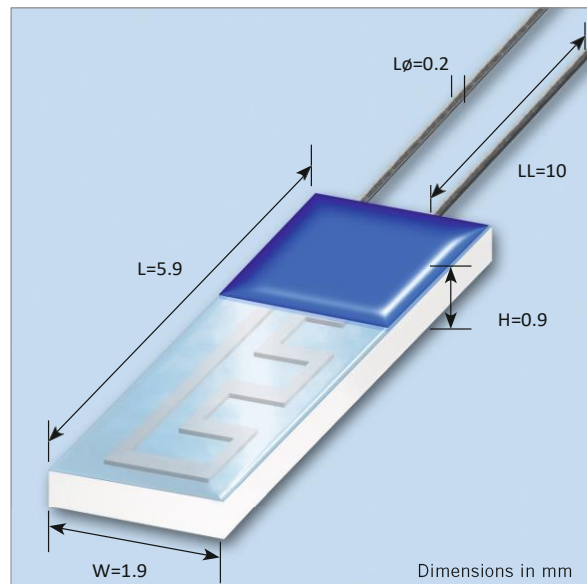

The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Web: www.heraeus-nexensos.com



M 620, Platinum Temperature Sensor according to DIN EN 60751

Temperature range $-70\text{ }^{\circ}\text{C}$ to $+500\text{ }^{\circ}\text{C}$, short-term up to $+550\text{ }^{\circ}\text{C}$

Shock resistance

At least 100g acceleration with 8ms half sine wave, depends on installation

Leads

Pt clad Ni- wire

Lead lengths (LL)

10 mm \pm 1 mm

Connection technology

Suitable for welding, brazing and crimping

Tensile strength of leads

$\geq 9\text{ N}$

Packaging

Alternative packaging forms on request.

Storage life

Min. 12 months (in original packaging)

Note

Other tolerances, values of resistance and wire lengths are available on request.

California Proposition 65



WARNING:

This product can expose you to chemicals including lead oxide, which is known to the State of California to cause cancer and birth defects or other reproductive harm, and including cobalt oxide, nickel and cobalt, which are known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Web: www.heraeus-nexensos.com

Name of document: 20002221119 Part 001 Version 02

Status: 02/2020