

## PCB 1325.4 (0805) Platinum Temperature Sensor according to DIN EN 60751

### Temperature range -40 °C to +150 °C

This platinum temperature sensor on a printed circuit board has been specially designed for use in calorimetry. When designing these sensors, the stringent requirements of this sector with regard to precision, long-term stability, cost minimization as well as the option for fully automatic further processing were of prime concern. The temperature sensor in an SMD-FC model forms the measurement active element on a PCB. The chip is connected with terminal faces with a thin conductive path in order to reduce heat dissipation and to prevent corruption of the measuring results. As a cable set sensor, it is suitable for a wide range of applications within a temperature range of -40 °C to 150 °C.

Nominal Resistance $R_0$	Tolerance	Order Number	Packaging
500 Ohm at 0 °C	F 0.3 (Class B)	30 201 107	Plastic box
1000 Ohm at 0 °C	F 0.3 (Class B)	30 201 106	Plastic box

#### Temperature and tolerance range

Tolerance class F 0.3 (B): -40 °C to +150 °C

#### Temperature coefficient

TCR = 3850 ppm/K

#### Response time

Water current ( $v = 0,4\text{m/s}$ ):  
 $t_{0.5} = 0.05\text{ s}$   
 $t_{0.9} = 0.1\text{ s}$

Air stream ( $v = 2\text{m/s}$ ):  
 $t_{0.5} = 1.5\text{ s}$   
 $t_{0.9} = 5.0\text{ s}$

#### Measuring current

500  $\Omega$ : 0.1 to 0.7 mA  
 1000  $\Omega$ : 0.1 to 0.3 mA

#### Long-term stability

$\leq 0,1\text{ K}$  after 1000 hours at 150 °C energized with:  
 Pt 500: 0.7 mA  
 Pt 1000: 0.3 mA

#### Self-heating

0.15 K/mW in ice water

#### Track resistance

Meander: 0.07 $\Omega$

#### Temperature change resistance

$\leq 0.1\text{ K}$  after 1000 change 0 °C / 150 °C in air

#### Contact

Cu connection pad with chem. Sn surface


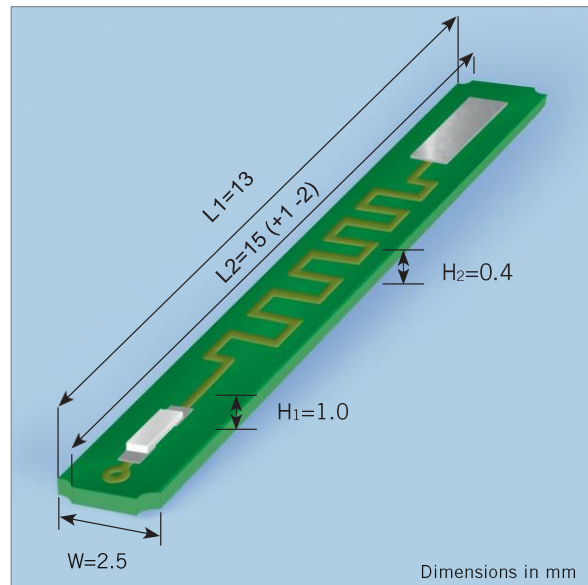


Image for illustration purposes only



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under [www.heraeus.com/gtc](http://www.heraeus.com/gtc) or may be furnished upon request. This data sheet is subject to changes without prior notice.  
 Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany  
 Web: [www.heraeus-nexensos.com](http://www.heraeus-nexensos.com)



## PCB 1325.4 (0805) Platinum Temperature Sensor according to DIN EN 60751

Temperature range -40 °C to +150 °C

### Connection technology

Suitable for soft soldering

- 1) Chip is soldered lead free
- 2) Connection pads are ready for lead free soldering

### Packaging

Alternative packaging forms on request.

### Storage life

At least 12 months (after manufacture), when stored under the recommended conditions. Longer shelf life may be possible, depending upon actual storage conditions, after requalification by customer

Nitrogen atmosphere recommended

### Note

Other tolerances and values of resistance are available on request.

### California Proposition 65



#### WARNING:

This product can expose you to chemicals including N,N-Dimethylformamide, which is known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under [www.heraeus.com/gtc](http://www.heraeus.com/gtc) or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Web: [www.heraeus-nexensos.com](http://www.heraeus-nexensos.com)