


## Infrared oven helps jam-maker to fill jars with quality preserves

A purpose-built carbon infrared oven has been instrumental in allowing Duerr's of Manchester to change from a hot water rinse system to a cold air rinse system at their Wythenshawe jam-making site. Duerr's is especially proud of its range of jam jars, which are filled in a continuous process with hot jam on a bottling line. Before filling, jars need to be rinsed and this was previously carried out by a hot water rinsing process. Heat was necessary to prevent thermal shock and possible breakage of the glass, as jars are stored at temperatures as low as -5°C and jam is at temperatures up to 97°C during filling. The glass manufacturers recommends a maximum temperature difference of 84°C. With the hot water rinse, the jars were pre-heated by the hot water. However, the hot water rinsing plant, which had been in use for many years, was becoming increasingly inefficient, resulting in high water usages and costs. Consequently, it was decided to replace the aging water-rinsing plant with a modern air-rinsing plant, bearing in mind that this would require a separate jar-heating system. After rejecting steam heating for this task, as it would have involved further water consumption, it was decided to investigate the potential of infrared heating and David Costello, the projects manager at Duerr's, contacted Heraeus Noblelight to ask them to carry out tests at their Neston Applications Centre. These proved so successful that a 50.4kW carbon medium wave oven was eventually installed. The oven fits over an existing conveyor belt and comprises two 25.2kW zones, each fitted with three carbon medium wave emitters. The emitters can be switched on according to the height of the jars being heated, with two emitters per zone switched on for jars up to 100mm high and three emitters per zone for jars higher than 100mm. An optical pyrometer measures the temperature of the jars as they leave the oven. In manual operation, the operator can manually adjust the delivered power of the oven via a potentiometer to achieve the required temperature. In automatic operation, the measured exit temperature of the bottles is fed back to a PID controller and the emitters are then automatically regulated to maintain the set temperature. In the event of a line stoppage, the emitters are automatically switched to a stand-by level at an on/off speed of response of around one second. Duerr's David Costello is very pleased with the installation, saying, "We have now saved over £8,000 Per annum on water consumption costs. In addition we have a rinsing and heating plant which is much more flexible, much easier to control and offers a better working environment to the workforce."

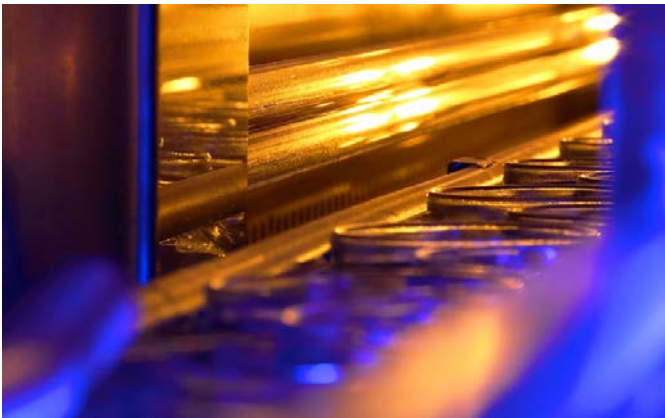

### Features

- Reduced water usage and water-heating bills
- More effective control over the total jar heating and rinsing process
- Flexible rinsing and heating plant which adjusts to the height of the jars

### Technical Data

- 50.4kW Carbon infrared oven with two zones and 3 CIR emitters each
- Optical pyrometer measures temperature of the jars as they leave the oven
- Manual and automatic operation possible

Germany  
**Heraeus Noblelight GmbH**  
 Infrared Process Technology  
 Reinhard-Heraeus-Ring 7  
 63801 Kleinostheim  
 Phone +49 6181 35-8545  
 Fax +49 6181 35 16-8410  
 hng-infrared@heraeus.com  
 www.heraeus-noblelight.com/infrared

USA  
**Heraeus Noblelight America LLC**  
 1520C Broadmoor Blvd.  
 Buford, GA 30518  
 Phone +1 678 835-5764  
 Fax +1 678 835-5765  
 info.hna.ip@heraeus.com  
 www.heraeus-thermal-solutions.com

Great Britain  
**Heraeus Noblelight Ltd.**  
 Clayhill Industrial Estate  
 Neston, Cheshire  
 CH64 3UZ  
 Phone +44 151 353-2710  
 Fax +44 151 353-2719  
 ian.bartley@heraeus.com  
 www.heraeus-infraredsolutions.co.uk

China  
**Heraeus Noblelight (Shenyang) LTD**  
 2F, 5th Building 5  
 No. 406, Guilin Rd, Xuhui District  
 200233 Shanghai  
 Phone +8621 3357-5555  
 Fax +8621 3357-5333  
 info.hns@heraeus.com  
 www.heraeus-noblelight.cn