



Infrared Heaters Weld Transport Boxes

Complex wheeled trolleys are produced from injection moulded plastic panels quickly and in an automated process within a special purpose machine, manufactured by Robot Units of Winsford. Infrared emitters transmit heat without contact to suit the programmed production processes. This protects the material, improves the quality of the end product and so reduces final costs.


Flat, blow moulded panels from thermoplastic HDPE (high density polyethylene) are supplied basically as unfolded boxes, together with all the integral fixing lugs and holes and slots which would be used in subsequent assembly operations. The formed panels eventually form the rear section of a new lightweight, wheeled trolley intended for bulk deliveries to supermarkets and for transporting linen around hospitals.

The lugs and slots, together with various mating faces, are used to weld the box together. However, their location is such that they are of different thicknesses and geometry. They are also of different shades.

Tests demonstrated that the weld achieved using short wave infrared emitters was stronger than the parent material itself and that there was no burning of the HDPE.

An array of short wave infrared emitters, of different lengths and power ratings, was fitted in the forming station. When the flat moulding arrives at the forming station it is first clamped before the individual short wave emitters are fired up in a programmed sequence to comply with the geometry, thickness and colour of the plastic panel. The flat panel is then folded by the pneumatic tooling and the selected, softened faces and connection points are welded together. Cold air is blasted into the station and the box is removed from the machine.

Infrared radiation is transferred without contact and generates heat directly within the product. Unlike contact plate welding, there is no hot plastic left on the heating source. So plastic parts can be welded together in a way which is reproducible every time, without smell, in a matter of seconds. There is no need for time-consuming cleaning procedures. In seconds, infrared radiation can be targeted to melt the mating surfaces of a product, which then are joined by simply pressing them together.

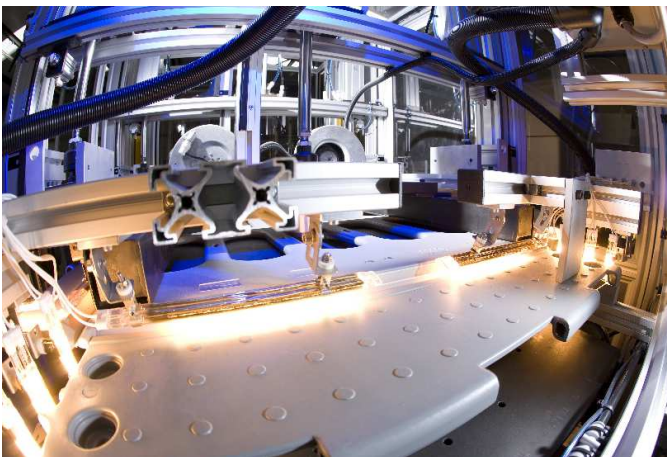

Features

- Infrared emitters are being used to weld HDPE panels during their forming into a box construction
- Lugs and slots of different thicknesses, geometries and shades, together with various mating faces, are used to weld the box together

Technical Data

- Short wave infrared emitters
- response time of seconds so that they can be easily controlled
- cycle times between 15 to 45 seconds

Germany
Heraeus Noblelight GmbH
 Infrared Process Technology
 Reinhard-Heraeus-Ring 7
 63801 Kleinostheim
 Phone +49 6181 35-8545
 Fax +49 6181 35 16-8410
 hng-infrared@heraeus.com
 www.heraeus-noblelight.com/infrared

USA
Heraeus Noblelight America LLC
 1520C Broadmoor Blvd.
 Buford, GA 30518
 Phone +1 678 835-5764
 Fax: +1 678 835-5765
 info.hna.ip@heraeus.com
 www.heraeus-thermal-solutions.com

Great Britain
Heraeus Noblelight Ltd.
 Clayhill Industrial Estate
 Neston, Cheshire
 CH64 3UZ
 Phone +44 151 353-2710
 Fax +44 151 353-2719
 ian.bartley@heraeus.com
 www.heraeus-infraredsolutions.co.uk

China
Heraeus Noblelight (Shenyang) LTD
 2F, 5th Building 5
 No. 406, Guilin Rd, Xuhui District
 200233 Shanghai
 Phone +8621 3357-5555
 Fax +8621 3357-5333
 info.hns@heraeus.com
 www.heraeus-noblelight.cn