


Infrared emitters for the efficient deburring of glove compartments and door handles

The company Hahn from Sontra designed in co-operation with Heraeus Noblelight an infrared system using small short-wave infrared emitters. Due to the three-dimensional arrangement and a fast energy transfer, the deburring of the products takes place so reproducibly that the process could be automated. The method is used successfully in door handles and glove compartments.

The cycle time for the deburring of internal car parts made of plastic is approximately 40 seconds, including part handling. This is made even more difficult if lacquered cladding parts, trim panels or glove boxes for right and left-hand drive vehicles are to be manufactured in the same plant. In order to remove these burrs, various methods were considered more closely. Mechanically, by grinding or milling, or thermally with a hot-air drier or a Bunsen burner. All these methods were carried out manually and the results were very different in quality, depending on the skill of the worker. The mechanical methods could have been automated by means of mechanical grinding or milling, but an intensive cleaning would have been necessary afterwards to remove the resulting chips. A hot air nozzle system proved to be very complicated in the production process and the process would have been very slow.

Therefore, Heraeus Noblelight developed an infrared system using small short-wave surface emitters. These emitters can be arranged well on the edges of three-dimensional products, are very controllable and transfer relatively much energy in a short time to limited areas. A total power of 10,400W was installed, the radiators are located about 20mm away from the product edge. The deburring of the products takes place within 5 seconds and is reproducible in such a way that the process could be automated. In order to make a better decision, the Hahn company computed the total energy requirement for each deburring cycle, once with a hot-air drier and once with infrared emitters. According to this calculation, 42.5 watt-hours for hot air compare to 8.7 watt-hours for infrared emitters.

Hahn has analyzed the entire process intensively and CEO Rainer Stück is particularly convinced by the energy efficiency: "We have found that, according to our calculations, the infrared system already amortizes within half a year!"

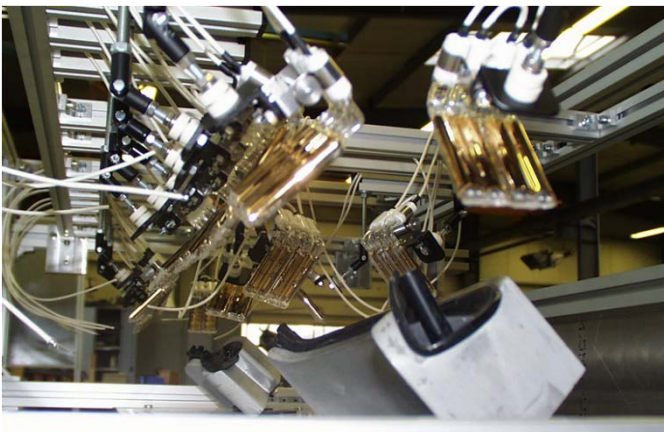

Features

- Automated deburring of glove compartments
- Analysis of different deburring techniques
- IR heat superior to other deburring methods
- High energy efficiency

Technical Data

- IR system with small short-wave surface emitters
- Easy to arrange on product edges
- Very controllable
- Deburring takes place within five seconds

Germany
Heraeus Noblelight GmbH
 Infrared Process Technology
 Reinhard-Heraeus-Ring 7
 63801 Kleinostheim
 Phone +49 6181 35-8545
 Fax +49 6181 35 16-8410
 hng-infrared@heraeus.com
 www.heraeus-noblelight.com/infrared

USA
Heraeus Noblelight America LLC
 1520C Broadmoor Blvd.
 Buford, GA 30518
 Phone +1 678 835-5764
 Fax +1 678 835-5765
 info.hna.ip@heraeus.com
 www.heraeus-thermal-solutions.com

Great Britain
Heraeus Noblelight Ltd.
 Clayhill Industrial Estate
 Neston, Cheshire
 CH64 3UZ
 Phone +44 151 353-2710
 Fax +44 151 353-2719
 ian.bartley@heraeus.com
 www.heraeus-infraredsolutions.co.uk

China
Heraeus Noblelight (Shenyang) LTD
 2F, 5th Building 5
 No. 406, Guilin Rd, Xuhui District
 200233 Shanghai
 Phone +8621 3357-5555
 Fax +8621 3357-5333
 info.hns@heraeus.com
 www.heraeus-noblelight.cn