




Infrared Heat Increases Productivity of Flameproof Textiles

Forgotten candles or a short circuit in the toaster – if a fire starts at home it should not get out of control. Curtains and home textiles should not contribute to the spreading of a fire and therefore they have to be equipped with flame-retardant properties. Essex Flameproofing is a long-established company which works with designers and specifiers, fabric manufacturers, major retailers and upholsterers to impart fire-retarding properties to furniture and fittings. This is achieved by treating the fabric of the upholstery or curtains with flame-retardant chemicals to comply with British and foreign standards and flame retarding regulations. The application of the relevant chemicals/coatings is a wet process and drying is, necessarily, an important production stage.

Upholstery is made fire-resistant by spraying the back of the upholstery cloth with a latex flame-retardant coating, which must then be dried. Previously this was achieved by heating the coated upholstery web with a long wave infrared system. However, to meet increasing demand for the company's expertise, it was decided to investigate ways of speeding up the drying process.

As a result, a new Heraeus medium wave infrared system was retrofitted. Now coated upholstery fabric can be dried in a single pass whereas three passes were often required with the previous system. This is partly due to the efficiency of medium wave infrared in water removal, as radiation at medium wave frequency is readily absorbed by water molecules and the energy is rapidly converted into heat.

The new system also finds further employment when it is used to provide extra capacity to dry treated curtains. Curtains are made fire-retardant by spraying them with a salt-based solution, which soaks into the fibres. When curtains come Scotch guarded, or when fabrics have low permeability, the uptake of the solution needs to be assisted by passing the wetted curtain through nip rollers. Normally, curtains are dried on their own line, but when there is capacity on the new Heraeus system, they are passed through for drying, again at twice to three times the speed.

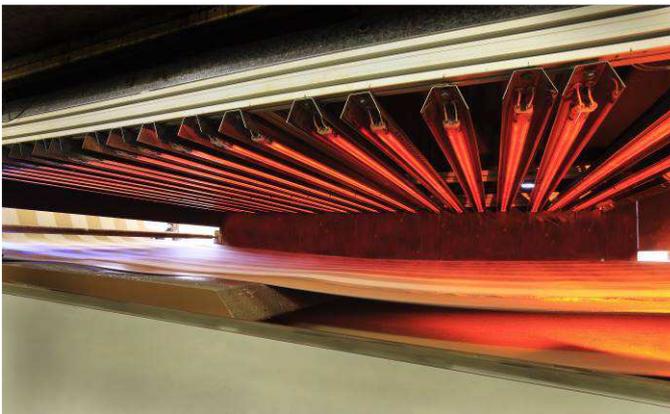

Features

- Drying of latex flame-retardant coating on upholstery cloth
- Drying of fire-retardant solution on curtains
- Medium wave Infrared heaters dry three times faster than previous long wave

Technical Data

- 21 medium wave Infrared heaters, with 4.5kW each in an aluminum framework
- arranged in seven banks of three emitters
- switched on and off to match the heating profile of the product to be dried

Germany
Heraeus Noblelight GmbH
 Infrared Process Technology
 Reinhard-Heraeus-Ring 7
 63801 Kleinostheim
 Phone +49 6181 35-8545
 Fax +49 6181 35 16-8410
hng-infrared@heraeus.com
www.heraeus-noblelight.com/infrared

USA
Heraeus Noblelight America LLC
 1520C Broadmoor Blvd.
 Buford, GA 30518
 Phone +1 678 835-5764
 Fax: +1 678 835-5765
info.hna.ip@heraeus.com
www.heraeus-thermal-solutions.com

Great Britain
Heraeus Noblelight Ltd.
 Clayhill Industrial Estate
 Neston, Cheshire
 CH64 3UZ
 Phone +44 151 353-2710
 Fax +44 151 353-2719
ian.bartley@heraeus.com
www.heraeus-infraredsolutions.co.uk

China
Heraeus Noblelight (Shenyang) LTD
 2F, 5th Building 5
 No. 406, Guilin Rd, Xuhui District
 200233 Shanghai
 Phone +8621 3357-5555
 Fax +8621 3357-5333
info.hns@heraeus.com
www.heraeus-noblelight.cn